





Dispensers for tesa Sleeve®

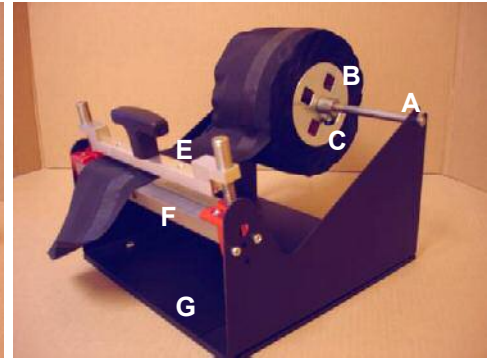

tesa Sleeve®
Dispenser 64100
Tear-off aid for perforated Sleeves

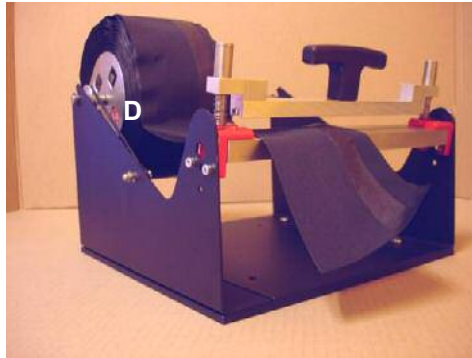

■ Elements and Material

A	Roll bar	Stainless steel
B	Core retainer	Plated steel
C	Wing mandrel	Stainless steel
D	V-Belt	Rubber
E	Pushing bar	Steel*
F	Pressure rim	Steel*
G	Base	Aluminium

*Stainless steel on request

■ Dimensions / Weight

Dispenser	mm	inch
Width	265	10,6
Depth	270	10,4
Height	245	9,6
	kg	lbs
Weight	3,7	8,2

■ Appliances

tesa Sleeve® versions	<ul style="list-style-type: none"> ▪ All perforated tesa® sleeves ▪ Core diameter 76 mm (3 in) ▪ Max. roll diameter 300 mm (11,8 in) ▪ Max. roll width 200 mm (7,9 in)
Processes	<ul style="list-style-type: none"> ▪ Inline consumption ▪ Horizontal and vertical installation possible

■ Instructions for use

1. In order to insert the tesa-roll the core holder must be removed first.
2. Pull off the movable wing mandrel.
3. Place the roll of sleeve tape on the fixed core holder and then replace the mandrel.
4. Pull off tape till perforation overruns pressure rim.
5. Push down pushing bar with one hand and tear off sleeve at perforation by the other hand.

■ Maintenance

- Adhesive residues are easy to remove with cleaning benzene.

■ Advantages

- Easy to handle.
- Pressure is evenly spread on pressure rim.
- Leading edge of material is always easy to find.
- Easy horizontal and vertical installation.

■ Price Indication

Dispenser 64100	325 €* → Dispensers in other dimensions on request
Spare parts	
Core retainer	€*

*net ex works / details on prices on request

✉ Contacts

Manufacturer and Service

Nauber-Feinmechanik
Thomas-Mann-Str. 29
D-22175 Hamburg
Tel.: +49 (0)40 640 1416
Fax.: +49 (0)40 640 7692
info@nauber-feinmechanik.de
www.Nauber-Feinmechanik.de

tesa contact

Please contact your local tesa service.



You can order this product directly from the supplier.
tesa assumes neither liability for the product nor responsibility for maintenance.